

DATA SHEET

System	
Processor	Intel Celeron J3455
Processor Speed	1.5 GHz
Processor Cores	4
Integrated Graphics	Intel HD Graphics 500
Memory	LPDDR4 8 GB

Rear I/O	
USB	1 USB 2.0 Port
Serial	1 COM Port (RS-232)
Power	1 DC Input Jack (12 V)
Other	Power Button, power indicator LED 1 MicroSD Card slot

Front I/O	
USB	2 USB 3.2 Gen 1 Ports
Ethernet	2 Gb LAN Ports
Video	2 Mini-DisplayPort


Side I/O	
Other	4 Antenna jacks

Expansion & Features	
Expansion & Storage	1 Full-size mPCIe (shared with mSATA) 1 Half-size mPCIe MicroSD Card 1 mSATA (shared with full-size mPCIe slot)


Mechanical	
Dimensions (WxHxD)	115 mm x 82 mm x 34 mm
Mounting Options	DIN-mount VESA-mount Wall-mount

Environmental & Regulatory	
Operating Temperature	0°C ~ 40°C
Certifications	FCC 47 CFR Part 15 CE UL Listed configurations available. CB scheme WEEE Directive (2002/96/EC) RoHS 2 (2011/65/EU) RoHS 3 (2015/863/EU) EN 55024 EN 55032 EN 62368-1 IEC 62368-1 IP50


Dimensional drawings

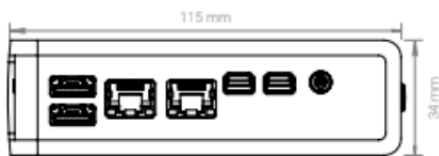


CL250 FRONT

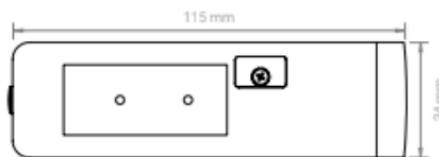

BACK



SIDE

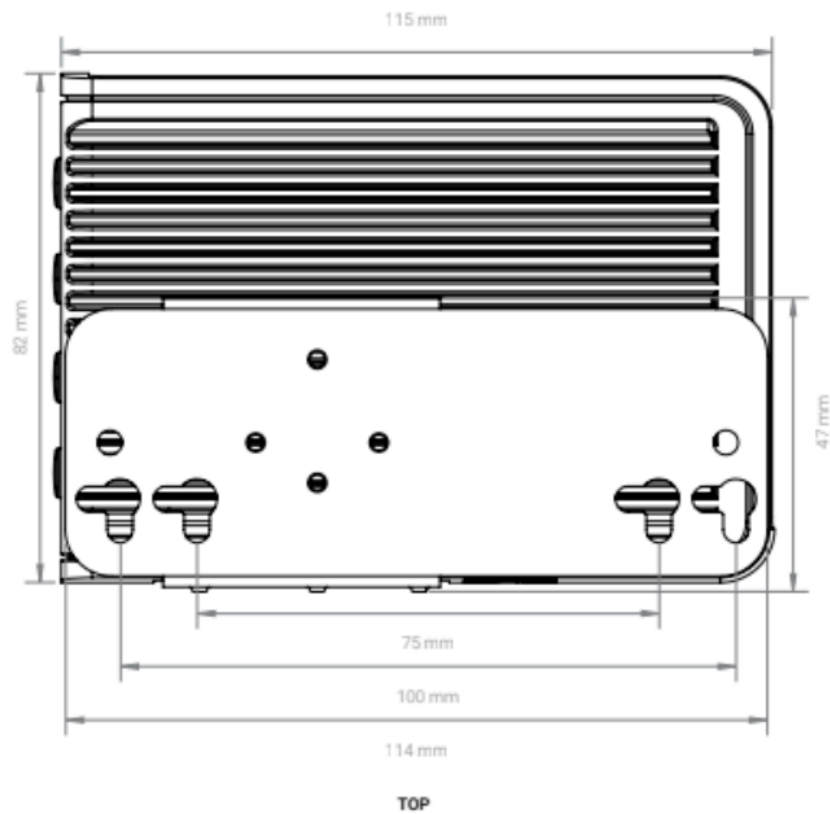

Installation

Please visit flowerhub.se/installation-guide for the latest information about the installation of the Flower Hub.

Hardware Provider



The hardware is provided by OnLogic.

Flower Infrastructure Technologies AB
Söder Mälarstrand 21
118 20 Stockholm, Sweden

info@flowerhub.se